





Fast Recovery Rectifier Diodes

SKN 135 F **SKR 135 F**
SKN 136 F **SKR 136 F**
SKN 140 F **SKR 140 F**
SKN 141 F **SKR 141 F**

V _{RSM} V _{RRM}	I _F RMS (maximum values for continuous operation) 260 A			
	I _{FAV} (sin. 180; T _{case} = 85 °C) 160 A		168 A	
V	t _{rr} = 500 ns		t _{rr} = 800 ns	
				
800	SKN 135 F 08	SKR 135 F 08	–	–
	SKN 136 F 08	SKR 136 F 08	–	–
1000	SKN 135 F 10	SKR 135 F 10	–	–
	SKN 136 F 10	SKR 136 F 10	–	–
1200	SKN 135 F 12	SKR 135 F 12	SKN 140 F 12	SKR 140 F 12
	SKN 136 F 12	SKR 136 F 12	SKN 141 F 12	SKR 141 F 12
1400	–	–	SKN 140 F 14	SKR 140 F 14
	–	–	SKN 141 F 14	SKR 141 F 14
1500	–	–	SKN 140 F 15	SKR 140 F 15
	–	–	SKN 141 F 15	SKR 141 F 15



Features

- Small recovered charge
- Soft recovery
- Up to 1500 V reverse voltage
- Hermetic metal cases with glass insulators
- Threaded studs M12
- **SKN**: anode to stud
- **SKR**: cathode to stud

Typical Applications

- Inverse diodes for GTO and asymmetric thyristors
- Inverters and choppers
- A. C. motor control, uninterruptible power supplies (UPS)

Symbol	Conditions	SKN135F SKR135F SKN136F SKR136F	SKN140F SKR140F SKN141F SKR141F	Units	
I _{FAV}	sin. 180; T _{case} = 85 °C; 1000 Hz	160	168	A	
	T _{case} = 100 °C; 1000 Hz	135	140	A	
	sin. 180/ rec. 120	T _{amb} = 45 °C; K 1,1	54/ 52	55/53,5	A
		P 1/200	97/ 93	100/ 96	A
	K 0,55	80/ 76	82/ 78	A	
	T _{amb} = 35 °C; P 1/120 F	136/130	141/134	A	
	K1,1 F	110/105	114/109	A	
I _{FSM}	T _{vj} = 25 °C; 10 ms	2500	2500	A	
	T _{vj} = 150 °C; 10 ms	2100	2100	A	
i ² t	T _{vj} = 25 °C; 8,3 ... 10 ms	31000	31000	A ² s	
	T _{vj} = 150 °C; 8,3 ... 10 ms	22000	22000	A ² s	
Q _{rr}	T _{vj} = 150 °C V _R = 400 V	I _F = 100 A	50	90	μC
		I _F = 300 A	75	135	μC
I _{RM}	- $\frac{di}{dt}$ = 100 $\frac{A}{\mu s}$	I _F = 100 A	53	90	A
		I _F = 300 A	69	115	A
I _R	T _{vj} = 25 °C; V _R = V _{RRM}	1	1	mA	
	T _{vj} = 150 °C; V _R = V _{RRM}	100	100	mA	
t _{rr}	T _{vj} = 25 °C T _{vj} = 150 °C	I _F = I _R = 1 A	max. 500	max. 800	ns
			typ. 1	typ. 1,6	μs
V _F	T _{vj} = 25 °C; I _F = 300 A	max. 1,95	max. 1,80	V	
V _(TO)	T _{vj} = 150 °C	1,1	1,1	V	
r _T	T _{vj} = 150 °C	2,3	2	mΩ	
R _{thjc}		0,2		°C/W	
R _{thch}		0,08		°C/W	
T _{vj}		- 40 ... + 150		°C	
T _{stg}		- 55 ... + 150		°C	
M a w	SI (US) units	10 (90 lb.in.)		Nm	
		59,81		m/s ²	
	approx.	100		g	
Case	135 F, 140 F 136 F, 141 F	E 14 E 31			

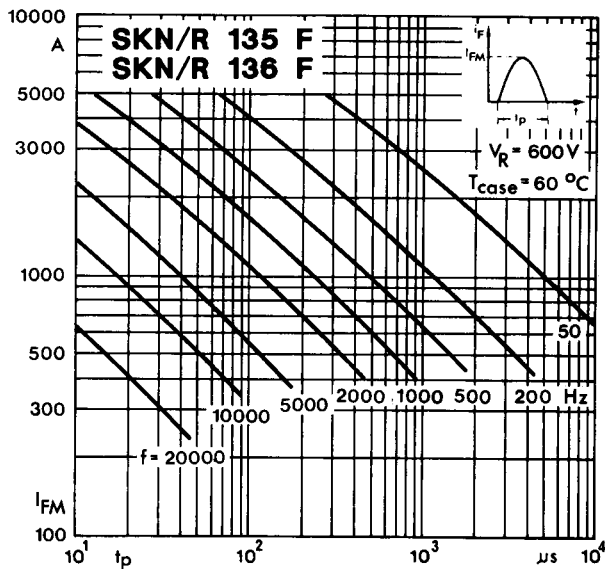


Fig. 1 a Rated sinusoidal peak forward current

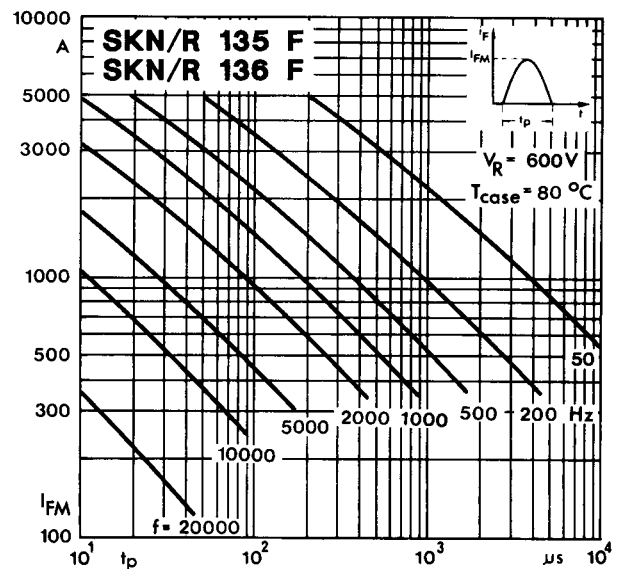


Fig. 1 b Rated sinusoidal peak forward current

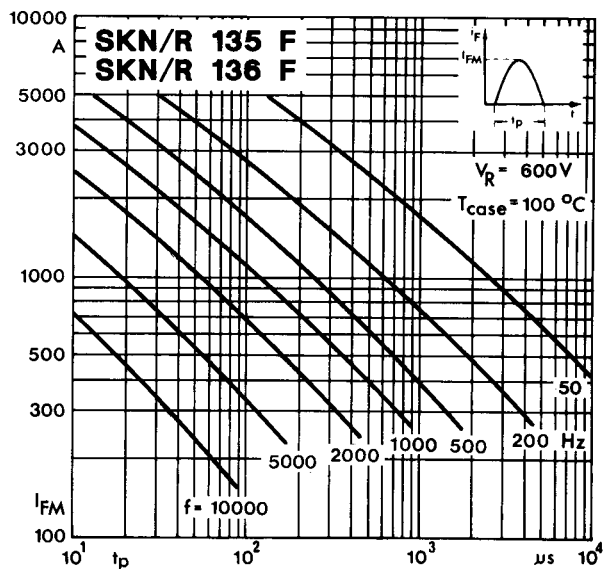


Fig. 1 c Rated sinusoidal peak forward current

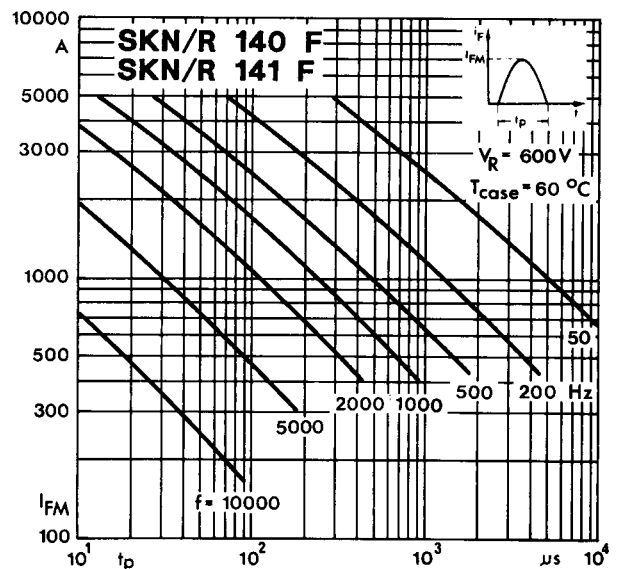


Fig. 1 d Rated sinusoidal peak forward current

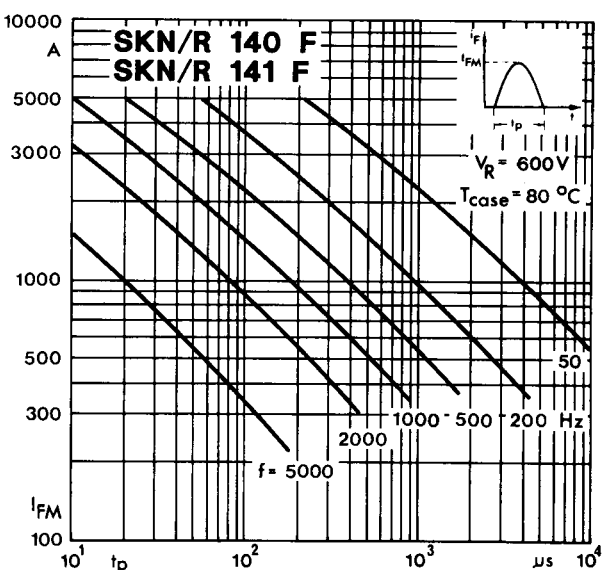


Fig. 1 e Rated sinusoidal peak forward current

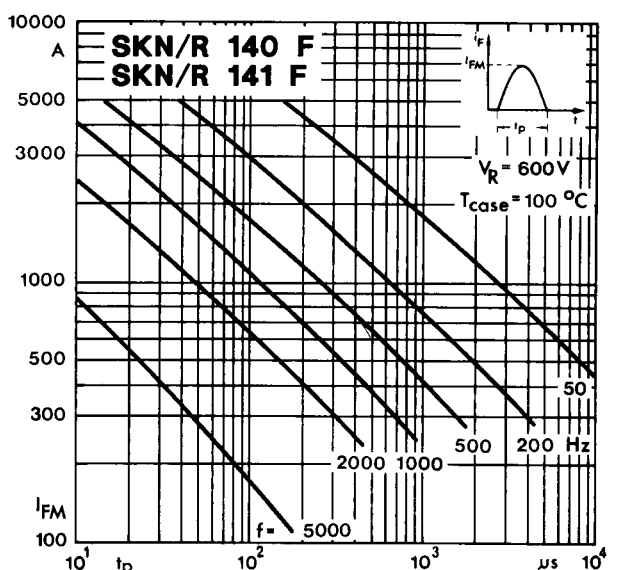


Fig. 1 f Rated sinusoidal peak forward current

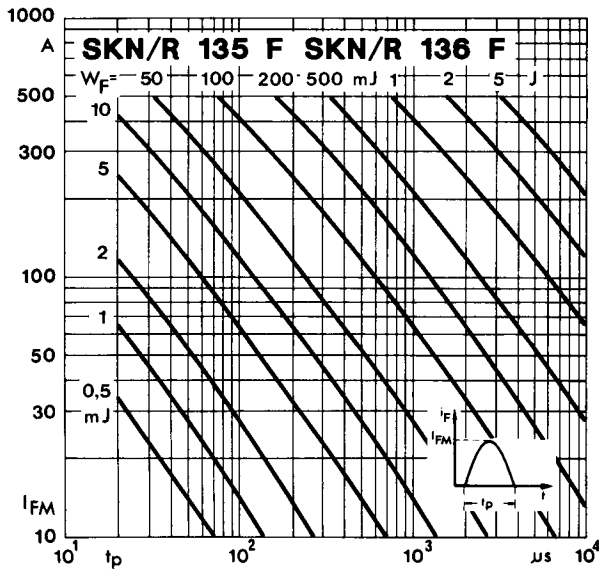


Fig. 2 a Forward energy dissipation, sinusoidal

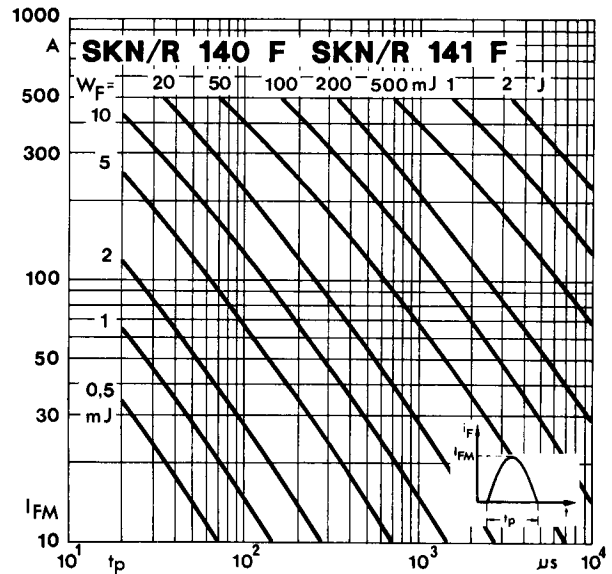


Fig. 2 b Forward energy dissipation, sinusoidal

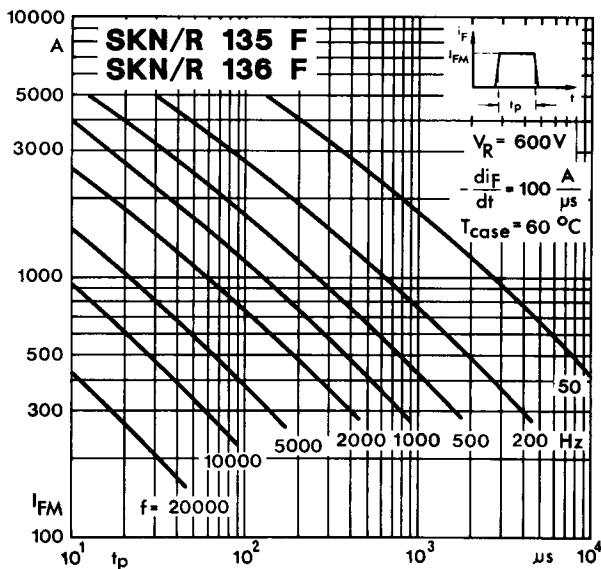


Fig. 3 a Rated rectangular peak forward current

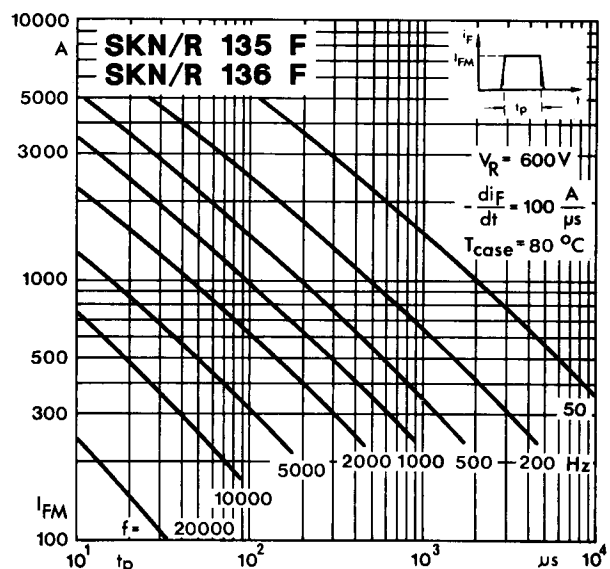


Fig. 3 b Rated rectangular peak forward current

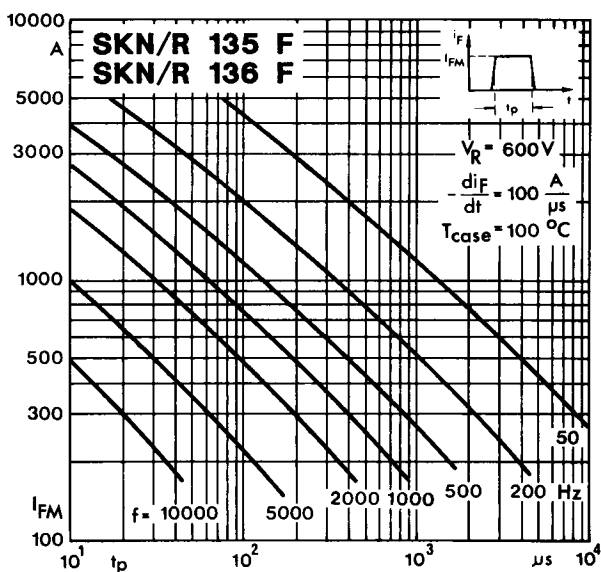


Fig. 3 c Rated rectangular peak forward current

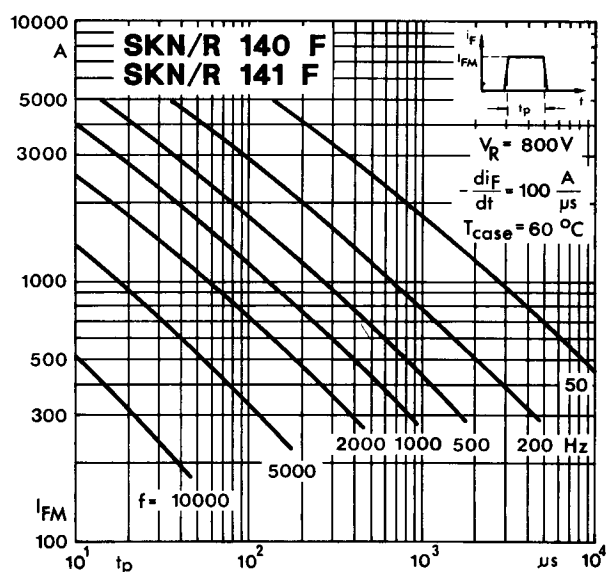


Fig. 3 d Rated rectangular peak forward current

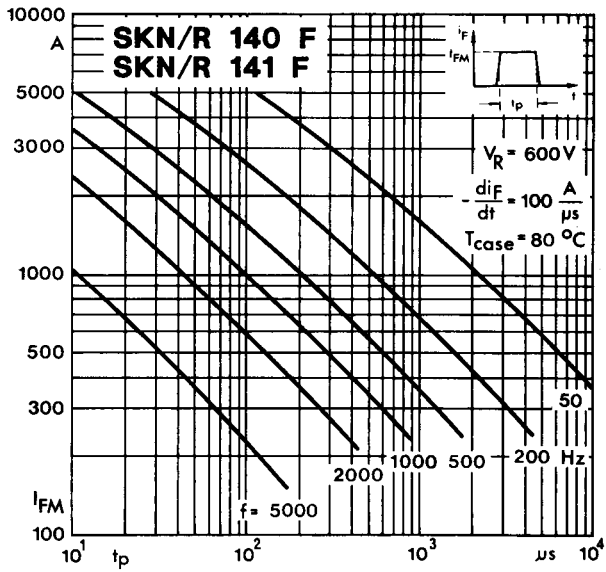


Fig. 3 e Rated rectangular peak forward current

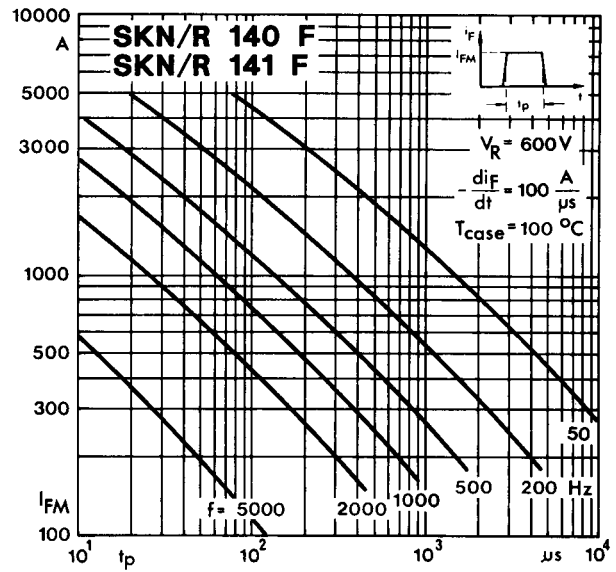


Fig. 3 f Rated rectangular peak forward current

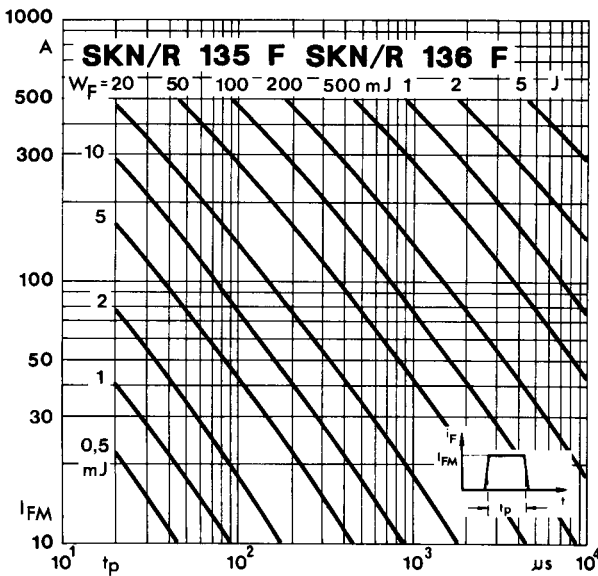


Fig. 4 a Forward energy dissipation, rectangular

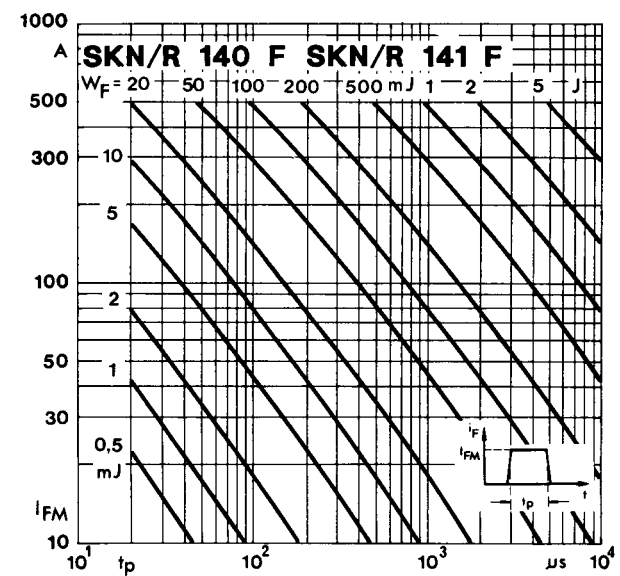


Fig. 4 b Forward energy dissipation, rectangular

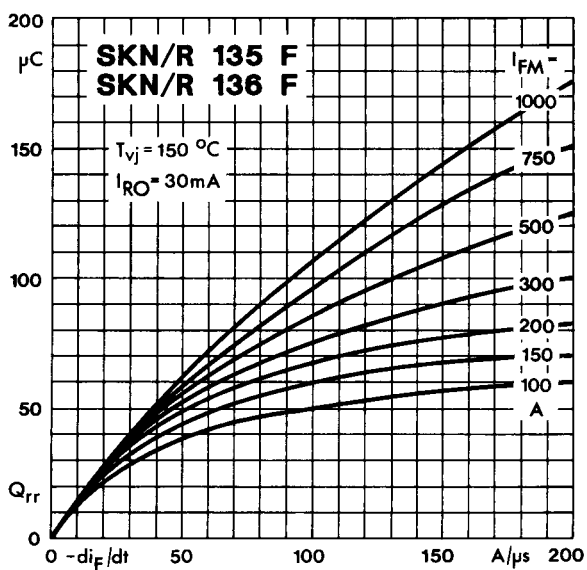


Fig. 5 a Recovered charge

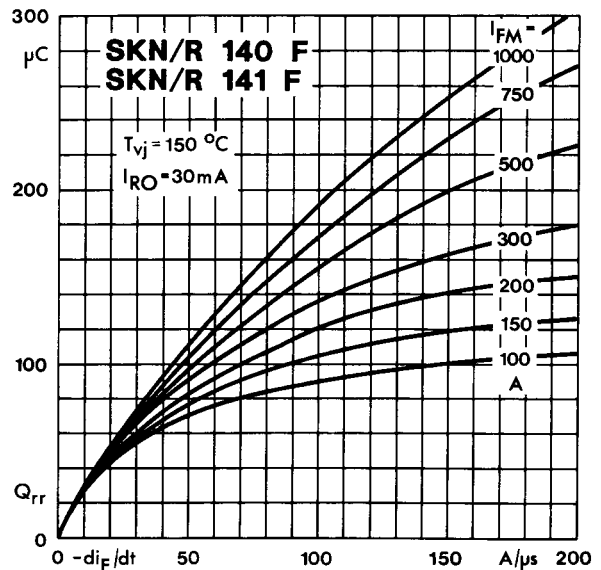


Fig. 5 b Recovered charge

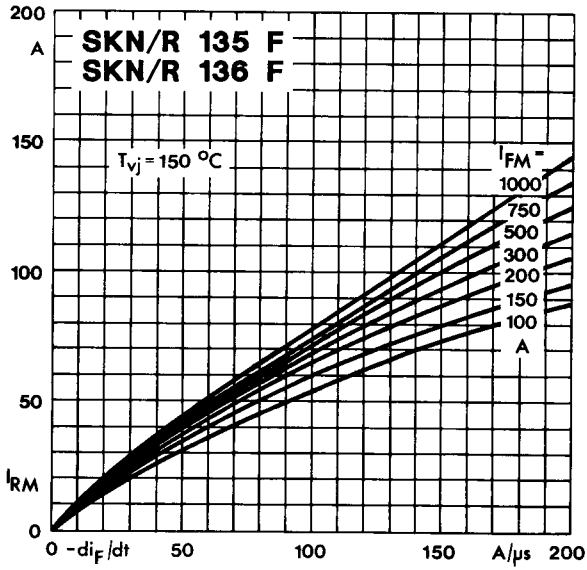


Fig. 6 a Peak reverse recovery current

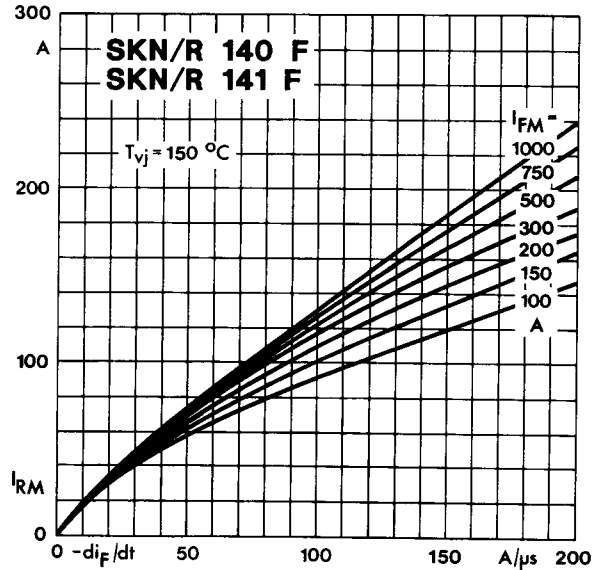


Fig. 6 b Peak reverse recovery current

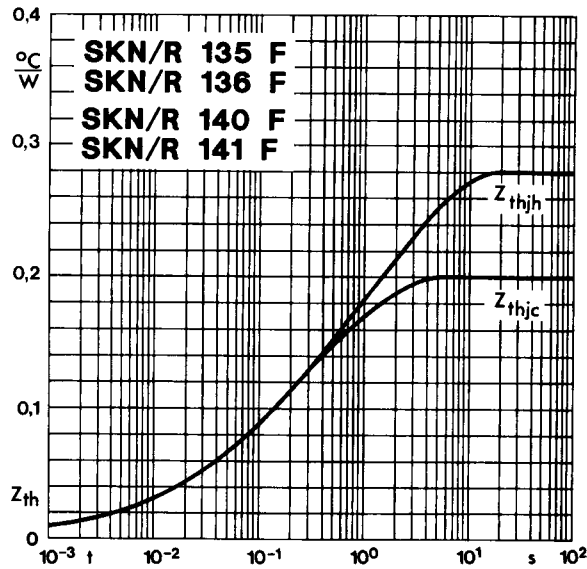


Fig. 7 Transient thermal impedance

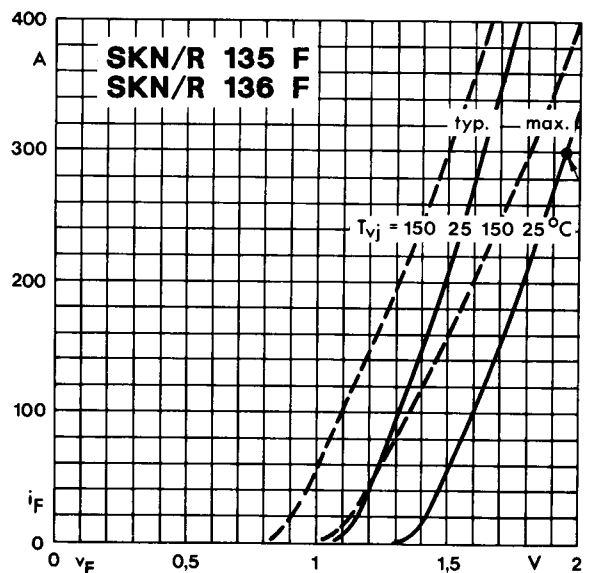


Fig. 8 a Forward characteristics

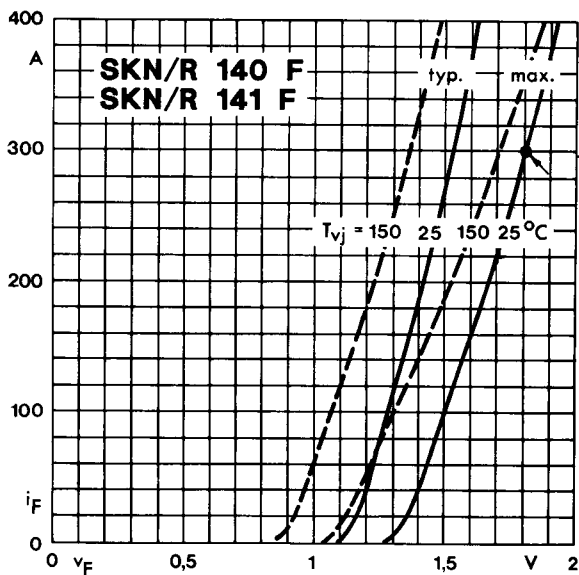


Fig. 8 b Forward characteristics


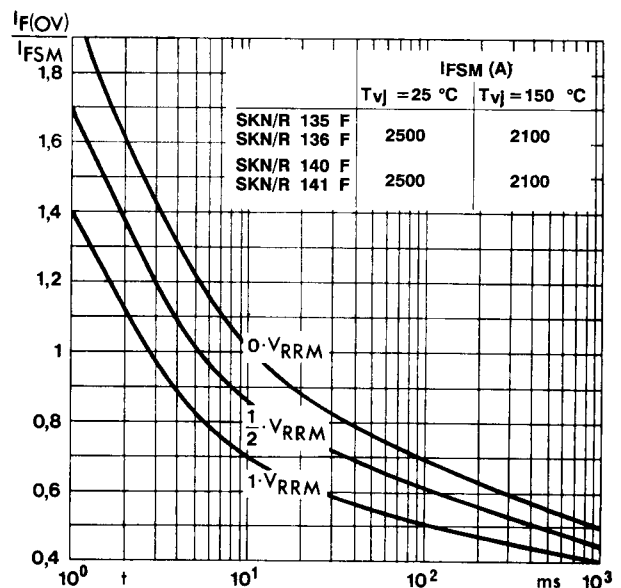


Fig. 9 Rated surge overload current

SKN 135 F
 SKR 135 F
 SKN 140 F
 SKR 140 F

Case E 14


IEC: A 9 MA¹⁾
 DIN 41 887: 105 B 2¹⁾
 BS 3934: SO-29 B
 JEDEC: DO-205 AC (DO-30)¹⁾²⁾

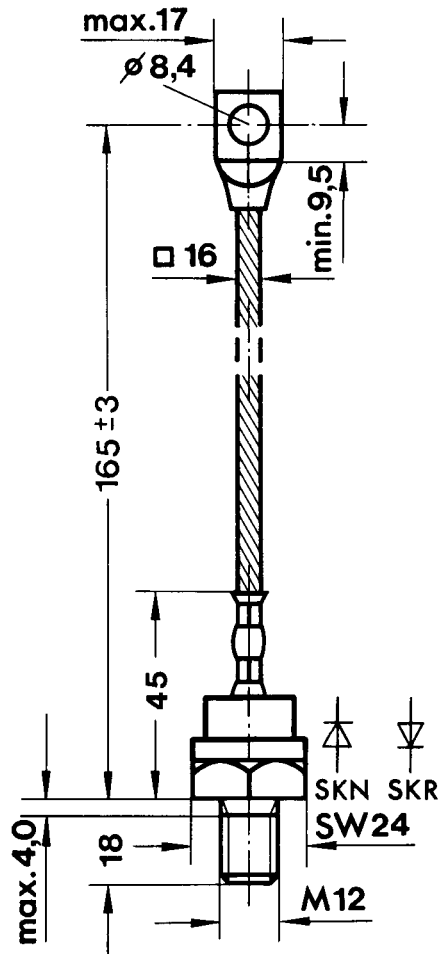

Dimensions in mm

SKN 136 F
 SKR 136 F
 SKN 141 F
 SKR 141 F

Case E 31

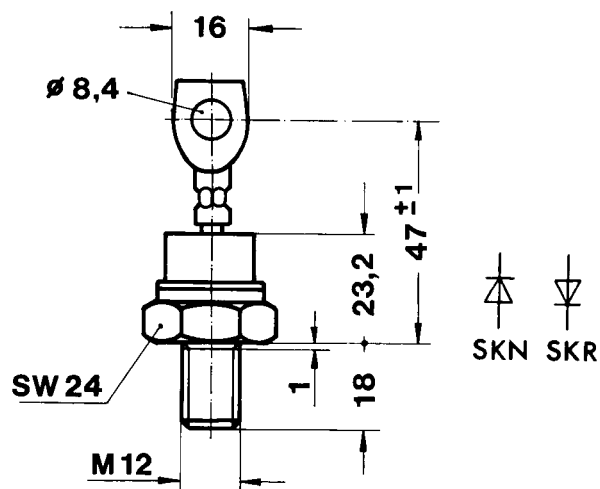

Dimensions in mm

¹⁾ modified

²⁾ These types are also available with the original DO-205 AA (DO-8) dimensions with thread 3/8-24.